




# Filmfabriek Pictor 8mm film scanner

## TECHNICAL SPECIFICATIONS

Oktober 2020

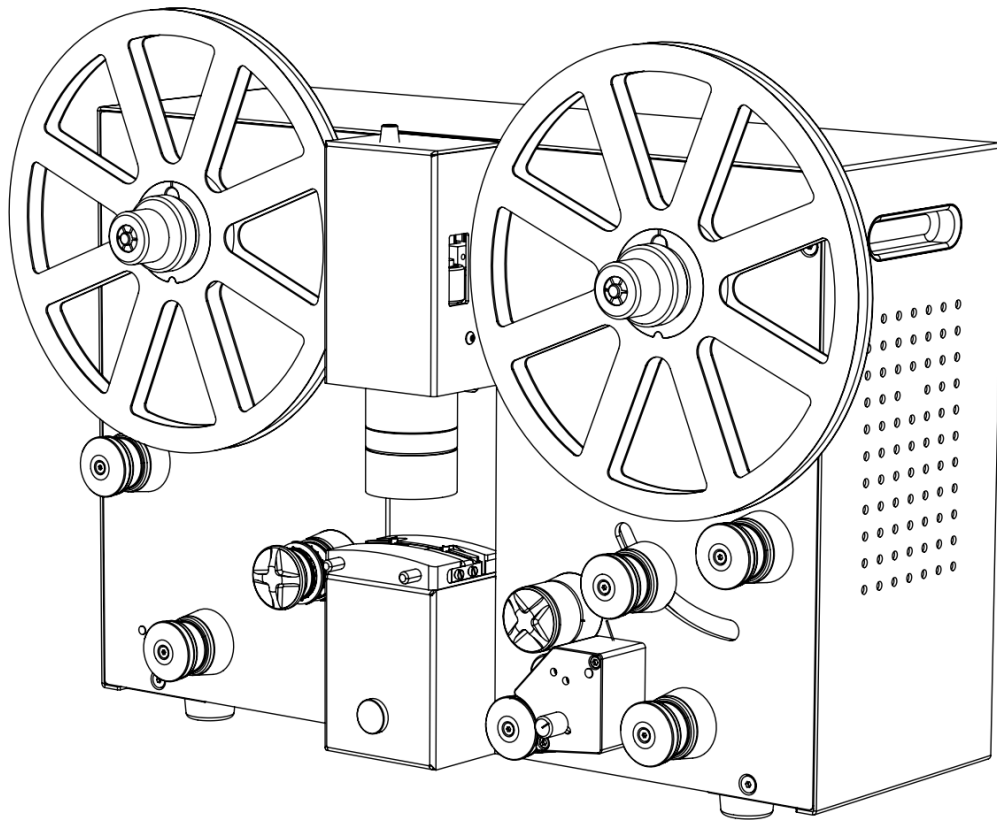

## CONTACT INFORMATION

[www.filmfabriek.nl](http://www.filmfabriek.nl)

Address (Europe):  
Ambachtsweg 2  
4854MK Bavel  
The Netherlands  
+31 85 27 37 253  
[info@filmfabriek.nl](mailto:info@filmfabriek.nl)

Address (USA):  
Bic Pic Media  
8037 Gabriels Bend Dr.  
Raleigh, NC, 27612  
+1 661 993 3985  
[info@bigpicmedia.net](mailto:info@bigpicmedia.net)

**FILMFABRIEK**

## TECHNICAL SPECIFICATIONS

### Filmfabriek Pictor 8mm film scanner

FILM FORMATS   RESOLUTION	
Film format	r8   s8 (reels up to 600 feet or 180 meter)
Film format options	Positive and negative
Resolution r8 mm	Full HD (1920x1080)
Resolution s8 mm	Full HD (1920x1080)

FILM TRANSPORT	
Transport type	Reel driven transport
Film tension	Active tension control (adjustable)
Rewind after recording	High speed reel-to-reel rewind
Film shrinkage	<5% shrinkage
Maximum scanning speed	25fps

GATE   OPTICS   LIGHT SOURCE	
Image framing	Overscan capture possible for both film formats
Optical zoom	Yes
Full Dynamic Range (FDR)	minimal noise and banding   increased detail in shadow areas
Trigger system	Sprocket Idler Wheel (SIW) for accurate sprocket registration
Light Source	Full spectrum RGB LED

WETGATE	
Image enhancement	90-95% vertical scratch removal on both formats

FILE OUTPUT	
Tiff	12-bit 4:4:4 RAW
DPX	10bit log
Avi	8bit RAW

FILE CONVERSION (Software included)	
ProRes	4444, 422hq, proxy
Other	H264/H265

DIMENSIONS   WEIGHT	
Width   height   depth	42,4cm / 29,7cm / 18,8cm
Weight	12,5 kg (easy transportable in optional flight case)

